

# TC-C32HP Spec: I3/E/C/2.8mm

2MP Super Starlight IR Dome Camera


# Tiandy



## Features

- Up to 1920X1080@30fps
- S+265/H.265/H.264/M-JPEG Codec
- Min. Illumination Color: 0.0008 Lux, B/W: 0.0001 Lux, 0 Lux with IR
- Smart IR, IR Range: 30m
- Operating Conditions -35 °C ~ 60 °C  
0 ~ 95% RHG
- PoE, IP66

## Dimensions

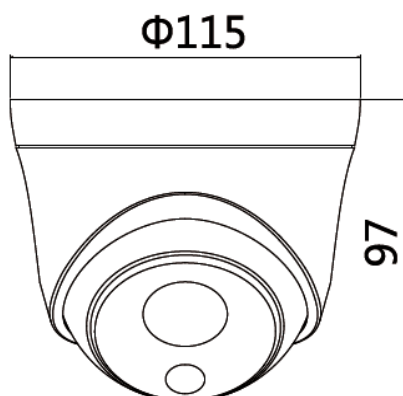

<b>Camera</b>	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.0008Lux B/W: 0.0001Lux
Shutter Time	1s to 1/100,000s
Lens	2.8mm
Lens Mount	M12
Day& Night	IR Cut Filter with Auto Switch
Wide Dynamic Range	120dB
Digital Noise Reduction	3D DNR
<b>Compression Standard</b>	
Video Compression	S+265/H.265/H.264/M-JPEG
Video Bit Rate	32Kbps~8Mbps
Audio Compression	N/A
Audio Bit Rate	N/A
<b>Image</b>	
Max. Image Resolution	1920x1080
Frame Rate	PAL:1080p@25fps, 960p@25fps, 720p@25fps, D1@25fps, VGA@25fps NTSC:1080p@30fps, 960p@30fps, 720p@30fps, D1@30fps, VGA@30fps
Mainstream	1080P(1920*1080)
Substream	4CIF (704*480)
3rd Stream	N/A
Image Settings	Brightness, Saturation, Contrast, Flip Mode Adjustable by Client Software or Web Browser
HLC	Y
Smart Defog	Y
Corridor Format	N/A
ROI	N/A
Privacy Mask	Y
Picture Overlay	N/A
OSD	16*16, 32*32, 48*48, Size Letters Such as Week, Date, Time, Total 1 Regions
<b>Network</b>	
Network Storage	N/A
NTP	Y
ANR	N/A
Video Analytics	N/A
EW	N/A
Alarm Trigger	Motion Detection/IP Conflict/MAC Conflict
Protocols	TCP/UDP/HTTP /DHCP/DNS /NTP /RTSP/IPV4/IPV6/IEEE802.1x
Remote Connection	N/A
System Compatibility	ONVIF (Profile S)
<b>Interface</b>	
Audio Input	N/A
Audio Output	N/A
Communication Interface	1-ch RJ45 10M / 100M Ethernet Interface
Alarm Input	N/A
Alarm Output	N/A
Video Output	N/A
On-board Storage	N/A
Extension	N/A
<b>General</b>	
Language	English, Simplified Chinese, Traditional Chinese, Spanish, Italian, Korean, Turkish, Russian, Thai, polish, French
Operating Conditions	-35°C ~ 60°C, 0 ~ 95% RHG
Power Supply	DC 12 V ± 25%, POE
Power Consumption	MAX 7.5W (POE), MAX 6W (DC12V)
IR Light	1
IR Distance	30m
White Light	N/A
Impact Protection	IP66
Dimensions	115mm(diameter)*97mm(height)
Weight	0.5KG

\* The latest product information / specification can be found at <http://en.tiandy.com/>



Tiandy Technologies Co., Ltd | [en.tiandy.com](http://en.tiandy.com)

Add: No.8, Huake Rd2, Binhai Hi-Tech Industry(Huayuan), Tianjin 300384 China

Tel: +86-22-58596037 Email: [sales@tiandy.com](mailto:sales@tiandy.com)

