


## UEC HALO SATELLITE DISH: Touch-Panel Operating Guide

### **Start Screen**

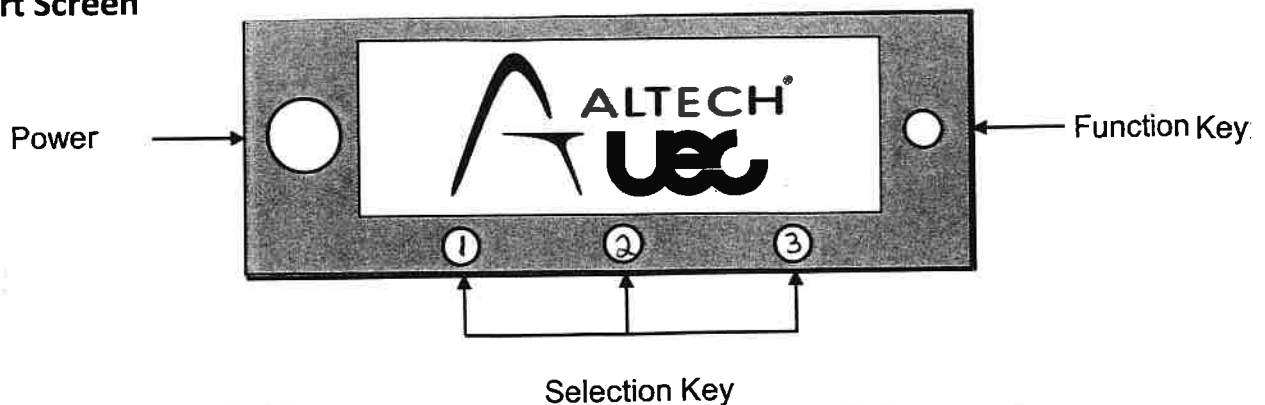

1. **Power-On Phase.** (Note. Leave your VAST STB and TV switched off until Halo has LOCKED)

- a. User Action: Operate the Red switch on Black electrical box from Off (O) to On (---). Red light illuminates.
- b. Do not touch any panel buttons until the display = SLEEP
- c. The dish will lift by 10 degrees and Close (This is normal)
- d. With Display showing SLEEP, System is ready to Deploy.

2. **Deploy Dish Phase.**

- a. User Action: Touch Power button on Panel (just once).
- b. Do not touch any panel buttons until display = LOCK
- c. The dish will move through four steps, indicated on Display:
  - i. 'DEPLOY'
  - ii. 'SEARCH'
  - iii. 'TUNING'
  - iv. 'LOCK'
- d. Once in the LOCK stage, the display will indicate a Percentage (70% to 80%, for example)
- e. At this point, you can switch your VAST Set Top Box and TV, On. (Note: Make sure that you have registered your Smart Card with VAST). After the STB has completed it's boot-up and scan for the first time, Channel 800 will appear on your TV screen. Press OK button on your STB remote control unit (RCU) and select a channel with Up & Down arrow on RCU.
- f. Refer to your Set Top Box User Guide for operation of the STB.

### **3. Close Dish Phase.**

- a. User Action: Touch Power Button, Once.  
Display will show 'SHUT DOWN?'
- b. To confirm, touch Selection button (1) below YES on display.
- c. Display changes to CLOSE, then SLEEP.
- d. Display switches Off.
- e. From this state (assuming you do not switch off Halo with Red Piano Switch on Black Electrical box), Touching the Power Button will Deploy Dish again.

### **4. Monitor and Diagnostics.**

- a. User Action. From any phase where 'MENU' is displayed above Selection button (2), touch button (2)
- b. From this screen, touch button (2) again to confirm, 'YES'.
- c. Screen will change to 1: POWER, 2: VIEW 0/22K
- d. Touch Button (3) to scroll through List 1 to 11.
- e. On any List item (1 to 11), touch button (2) to view details.
- f. To step back to the list or to the main screen, touch the Function Button at the right of Display (opposite Power Button)